CHINA-BASED MANUFACTURER. CUSTOM & OEM.

Engineered Flooring Manufacturing & OEM Handbook

A practical guide to engineered flooring manufacture, product selection and OEM cooperation with GoLink Floor in China. Since 1996, we have developed wood flooring for international trade buyers, with free oak, teak and walnut samples available.



For importers, wholesalers, distributors and flooring brands. Manufacturing cooperation guidance; product-specific information, approved samples and accepted order records define the actual supply.

01 / FROM SELECTION TO SUPPLY

Choose a manufacturing partner

GoLink Floor manufactures engineered wood flooring in Deqing, China, for importers, wholesalers, distributors and flooring brands. Our company profile dates to 1996 and lists six production workshops, a 58,000 m² land footprint, ten warehouses and more than 200 employees. We combine wholesale supply with custom development and OEM / private-label production.



01 Identify the target market, sales channel and role of each floor in your range.

02 Choose European oak, Russian oak, black walnut, Burmese teak or ash as a species direction.

03 Consider planks, herringbone, chevron or custom parquet for the range.

04 Provide estimated quantities, destination and your required product documents.

05 Use online styles as design references; request the actual manufacturing specification.

KEEP IN MIND

Our headquarters is in Deqing, with warehouse bases and personnel in Deqing, Suifenhe, Dalian and Jiangsu. These locations are not presented as four separate production factories.

Related guidance: Wholesale Distribution Oem Private Label Factory

Questions: sales@golinkfloor.com

02 / FROM SELECTION TO SUPPLY

Specify the engineered board

GoLink engineered flooring combines a natural hardwood veneer with a multi-layer eucalyptus or birch plywood support. The brochure lists hardwood face options of 2, 3, 4, 5 and 6 mm. Select the complete board construction for your format; a general layer range is not the specification of an individual online reference.



01 Record the hardwood species and face thickness separately from the total board thickness.

02 Identify the plywood support, joint profile and bevel required for the product.

03 Listed range options span 450-2200 mm in length and 70-300 mm in width.

04 Use the exact standard herringbone and chevron combinations in the construction guide.

05 Leave unmapped reference dimensions open; do not combine every listed length and width automatically.

KEEP IN MIND


The plywood is cross-oriented to support stability. Franklin REACTITE EP921 is used for cold pressing in the documented manufacturing process. Final construction and dimensions belong in the accepted technical sheet.

Related guidance: Wood Flooring Construction Wood Grading Installation Guide
Questions: sales@golinkfloor.com

03 / FROM SELECTION TO SUPPLY

Develop colour, texture and coating

Elements, Silence, Emerge, Create and Parquet provide distinct collection directions: natural timber, antique character, light and neutral colours, reactive colour processes and geometric modules. Our range includes brushing, hand-worked effects, smoking and other treatments. A colour treatment is separate from the protective oil or lacquer system.

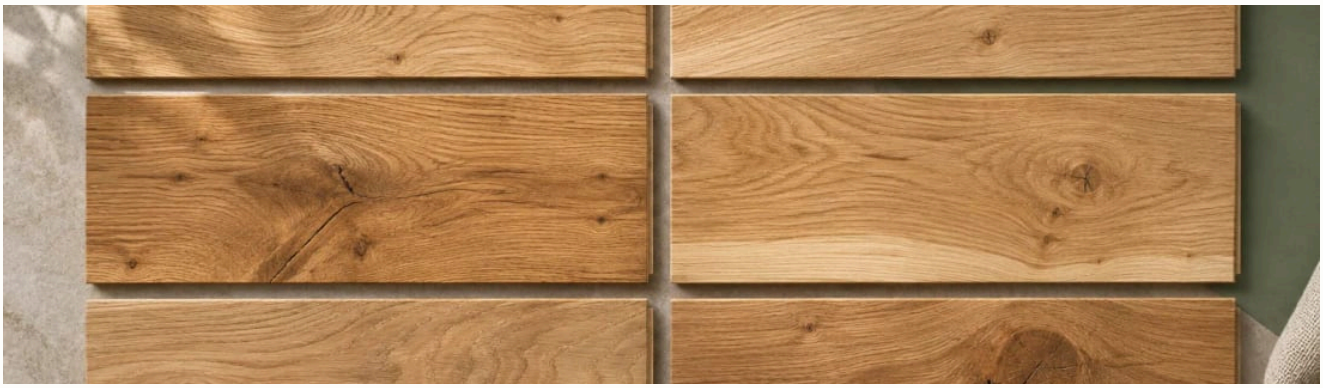

01 Use a complete GL colour reference to identify a brochure starting point.

02 Compare grain, knots, sapwood and filling across a representative range.

03 Record brushing, hand-work or colour treatment separately from the coating.

04 Discuss Treffert UV lacquer or oil options, including WOCA natural oil.

05 Approve sheen and colour under relevant lighting, alongside accessory finishes.

KEEP IN MIND

The brochure describes different coating systems and schedules. Their layer counts and performance must remain tied to the selected system, rather than copied to every design reference.

Related guidance: Surface Finishes Wood Grading Flooring Accessories
Questions: sales@golinkfloor.com

04 / FROM SELECTION TO SUPPLY

Request and approve samples

Free oak, teak and walnut samples are available from GoLink. Send your preferred species, collection or GL colour reference to sales@golinkfloor.com with the destination and purpose of the sample. A colour piece, board section, pattern set and dealer display answer different selection questions.



01 Choose a sample format that shows the appearance and detail you need to review.

02 Check colour, grade, texture, coating and sheen across representative pieces.

03 Record the sample identity, review date, accepted variation and requested changes.

04 Keep dimensions, installation, heating and required reports in the technical record.

05 Agree courier arrangements and any bespoke development or special presentation work separately.

KEEP IN MIND

Free samples do not imply free international courier delivery. An approval records an appearance range; it does not make every natural wood board identical.

Related guidance: Sample Request Reviewing Wood Flooring Samples How To Order
Questions: sales@golinkfloor.com

05 / FROM SELECTION TO SUPPLY

Build your OEM product record

OEM development connects your flooring brief with production samples, product identification and branded packing. Options include custom dimensions, colour, texture and format, with tongue-and-groove, connecting splines and 2G / 5G systems considered for the selected configuration. The brochure includes 45° and 60° chevron and other angle enquiries.



01 Define the range position, species, grade, format and finish requirements.

02 Keep an approved sample and a dated specification for each manufacturing reference.

03 Provide product names, GL references where applicable, labels and carton artwork.

04 Name the people who approve the flooring and those who approve the artwork.

05 Retain product, sample and packaging revisions for repeat orders.

KEEP IN MIND

The nine online design references are not assigned to brochure GL codes or collections without a matching record. Build a product identity around the configuration actually approved.

Related guidance: Oem Private Label · Oem Flooring Program Checklist For Brands And Importers · Packaging Shipping
Questions: sales@golinkfloor.com

06 / FROM SELECTION TO SUPPLY

Connect quality, packing and delivery

Manufacturing includes veneer sorting and thickness checks, moisture balancing, cold pressing, surface repair, sanding, brushing, HOMAG profiling and coating. Product and sample records connect these stages to the order. Floors are packed in paper cartons with transparent plastic film, then placed on pallets for container shipment.



01 List the accepted construction, appearance range, quantities and accessory references.

02 Agree the inspection scope, acceptance criteria and records before production.

03 Approve carton information, product labels, pallet requirements and OEM artwork.

04 Record price basis, minimum quantities, milestones and delivery responsibilities.

05 List the documents required for the selected product and destination.

KEEP IN MIND

The seven-day moisture-balancing step in the brochure is not an order lead time. MOQ, production timing and transport arrangements remain specific to the accepted order.

Related guidance: How To Order Quality Control Packaging Shipping
Questions: sales@golinkfloor.com

07 / FROM SELECTION TO SUPPLY

Keep product and warranty records

GoLink offers a 25-year warranty for plank, chevron and herringbone flooring. Obtain the applicable written terms for your product and order, together with installation and coating-specific care instructions. The brochure describes moisture-resistant engineered flooring and excludes bathroom use; moisture resistance is not waterproofing.



01 Check quantities, labels and visible packing condition at receipt.

02 Photograph discrepancies and retain the delivery, product and batch references.

03 Request relevant FSC, JAS, CE or test documentation for the selected configuration.

04 Keep the accepted sample, specification, care instructions and written warranty terms.

05 Report an issue with the affected quantity, photographs and storage or site information.

KEEP IN MIND

Company certification references do not replace documents for the selected floor. A retained record supports after-sales review without predetermining a remedy or promising identical replacement colour.

Related guidance: After Sales Support Care Maintenance Certifications Reports
Questions: sales@golinkfloor.com